




SIERRA OP



SIERRA OP

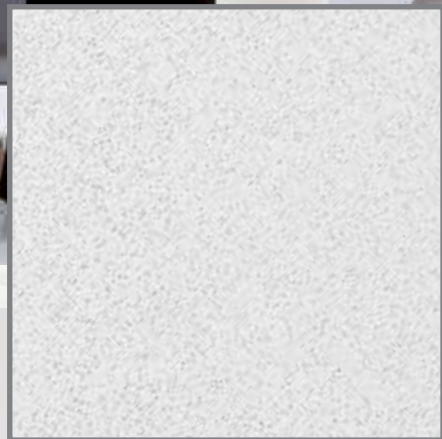

Recycled Content

15%
EN ISO
14021



Light Reflectance

84%
EN ISO
7724-2 & 3



Concentration

SIERRA OP

	BOARD	TEGULAR	MICROLOOK	SL2	
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm	 Prelude 24 mm Main Runner Prelude Sixty ²	 System Z
Board & Tiles					
600 x 600 x 17 mm	3780 M	3783 M	3784 M		
625 x 625 x 17 mm	3780 D	3783 D	3784 D		
675 x 675 x 17 mm			3785 M		
600 x 1200 x 17 mm	3781 M		3416 M		
625 x 1250 x 17 mm	3781 D				
Planks					
300 x 1500 x 17 mm				3786 M	
300 x 1800 x 17 mm				3787 M	
600 x 1500 x 17 mm	3782 M				
600 x 1800 x 17 mm	3796 M				



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.90	0.85	0.50	0.75	0.85	0.85	1.00	1.00	α_p

Sound Absorption Class = A




EN ISO 10848-2
& EN ISO 717-1

D_{nfw}
27 dB (Board & Tiles + Planks Board)
29 dB (Concealed Planks)



EN ISO 140-3
& EN ISO 717-1

R_w
11 dB (Board & Tiles)

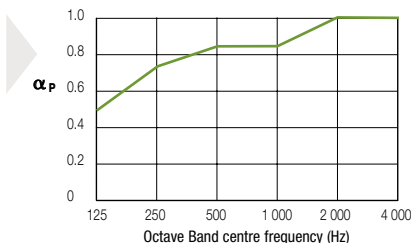

EEA Euroclass A2-s1,d0
EN 13501-1

RUS KM1 (G1, V1, D1, T1)
FZ 123



EN 12667
& ISO 8301

$\lambda = 0.037 \text{ W/m K}$



95 % RH



ISO 14644-1

ISO 5



15 YEAR
guarantee



30 YEAR
system
guarantee



$\approx 3.2 \text{ kg/m}^2$

Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu

Armstrong®